

Install a child seat in the front passenger seat

WARNING

Never install a child seat in the front passenger seat when the airbag is activated. If the airbag deploys the child could be killed or seriously injured.

WARNING

Never leave a child alone in the car. The temperature inside the car can quickly become hot and could result in death or serious injury.

We recommend

We recommend that you seat your child in a rear-facing child seat for as long as possible (at least until 4 years of age), it's much safer. If they have outgrown the largest size of rear-facing child seat, we recommend they sit in a front-facing child seat for as long as possible. If they have outgrown the largest size of front-facing child seat, we recommend that they sit in the rear seat with the seat belt fastened, like an adult, rather than sitting in the front seat. But, always follow local laws; they differ from country to country.

Install

- 1 Deactivate the front passenger airbag.
- 2 Adjust the front passenger seat to the highest position.
- 3 Install the child seat according to the child-seat manufacturer's instructions.
- 4 Check the child seat is secure.

If needed, here's how to use the floor anchors.

Tall child?

We recommend that they sit in the rear seat with the seat belt fastened, like an adult, rather than sitting in the front seat. Always follow local laws; they differ from country to country about when a child can stop using a child seat.

But, if needs must and your child will sit in the front seat without a child seat:

- 1 Adjust the front passenger seat to the highest position.
- 2 Keep the front passenger airbag activated.
- 3 Don't use a booster seat, and use the seat belt as per an adult.

Did you know?

Studies show that it's safer to put your child in the rear seat.

Install a child seat in the rear seat

WARNING

Never leave a child alone in the car. The temperature inside the car can quickly become hot and could result in death or serious injury.

Install the child seat according to the child-seat manufacturer's instructions, making sure that it does not touch the backrests of the front seats, as this could interfere with the function of the child seat.

In the rear seat, you can use:

- ISOFIX/i-Size
- The car's seat belt

We recommend

We recommend that you seat your child in a rear-facing child seat for as long as possible (at least until 4 years of age), it's much safer. If they have outgrown the largest size of rear-facing child seat, we recommend they sit in a front-facing child seat for as long as possible. If they have outgrown the largest size of front-facing child seat, we recommend that they sit in the rear seat with the seat belt fastened, like an adult, rather than sitting in the front seat. But, always follow local laws; they differ from country to country.

Install a child seat with the car's seat belt

WARNING

Never install a child seat in the front passenger seat when the airbag is activated. If the airbag deploys the child could be killed or seriously injured.

WARNING

Never leave a child alone in the car. The temperature inside the car can quickly become hot and could result in death or serious injury.

Install

- 1** Pull out the car's seat belt **completely**.
- 2** Secure the child seat with the car's seat belt, according to the child-seat manufacturer's instructions.
- 3** Pull the car's seat belt tight around the child seat.
- 4** Check the child seat is secure.

Note: Always install the child seat correctly even when it is not in use and left inside the car, to reduce the risk of any damage.

Note: We do not recommend using a child seat that has a support leg in the center rear seat.

Extra-secure installation

The outer rear seats are fitted with top tether anchors for use with forward-facing child seats, and the outer rear seats and the front passenger seat have floor anchors for use with rear-facing child seats.

Install an ISOFIX child seat



⚠ WARNING

Never leave a child alone in the car. The temperature inside the car can quickly become hot and could result in death or serious injury.

⚠ WARNING

Child seat anchor points are only designed for loads from correctly fitted child seats. Never attach more than one child seat to a single anchor. Never attach an adult seat belt or harness to an anchor. The anchor could break or malfunction and result in death or serious injury.



Install

- 1** Secure the child seat to the car's ISOFIX anchors, according to the child-seat manufacturer's instructions.
- 2** Check that the child seat is secure.

If needed, the outer rear seats are fitted with top tether anchors for use with forward-facing child seats, and floor anchors for use with rear-facing child seats.

Note: Always install the child seat correctly even when it is not in use and left inside the car, to reduce the risk of any damage.

Follow the rules

It's mandatory to place a child under 15 months in a rear-facing seat.

We recommend that you seat your child rear-facing until at least 4 years of age, it's much safer.

ISOFIX or i-Size?

You can use either, both are compatible.

Over-excited child?

It's possible to use the child safety locks on the rear doors and you can also deactivate the rear window controls.

Use the child seat top tether anchors



⚠ WARNING

Child seat anchor points are only designed for loads from correctly fitted child seats. Never attach more than one child seat to a single anchor. Never attach an adult seat belt or harness to an anchor. The anchor could break or malfunction and result in death or serious injury.

⚠ WARNING

Do not install any accessories that require the removal of the top tether or floor anchors or that can interfere with the use of the tether straps. Doing so could affect the operation of the child seat restraint system and could result in death or serious injury.



Both outer rear seats have top-tether anchors for additional installation of forward-facing child seats using a seat belt.

Instructions

Single-strap top tether

- 1 Install the child seat according to the child-seat manufacturer's instructions.
- 2 Remove the parcel shelf in the luggage area.
- 3 Route the strap **under** the head rest.
- 4 Attach the strap to the anchor point according to the child-seat manufacturer's instructions.
- 5 Check the child seat and top tether straps are secure.

No head rest? If you have removed the head rest you can still use the top tether anchor, but you must make sure that the strap goes between the head rest sockets. Make sure the head rest is stored securely as well.

Y-strap top tether

- 1 Install the child seat according to the child-seat manufacturer's instructions.
- 2 Remove the parcel shelf in the luggage area.
- 3 Route the strap **either side** of the head rest.
- 4 Attach the strap to the anchor point according to the child-seat manufacturer's instructions.
- 5 Check the child seat and top tether straps are secure.

No head rest? If you have removed the head rest you can still use the top tether anchor, but you must make sure that the strap goes either side of the head rest sockets. Make sure the head rest is stored securely as well.

Rear-facing child seat?

Great! It's safer for the child. The outer rear seats and the front passenger seat feature floor anchors that are suitable for rear-facing seats. Do not use the top tether anchors; they are intended for forward-facing seats.


Use the child seat floor anchors

WARNING

Child seat anchor points are only designed for loads from correctly fitted child seats. Never attach more than one child seat to a single anchor. Never attach an adult seat belt or harness to an anchor. The anchor could break or malfunction and result in death or serious injury.

WARNING

Do not install any accessories that require the removal of the top tether or floor anchors or that can interfere with the use of the tether straps. Doing so could affect the operation of the child seat restraint system and could result in death or serious injury.

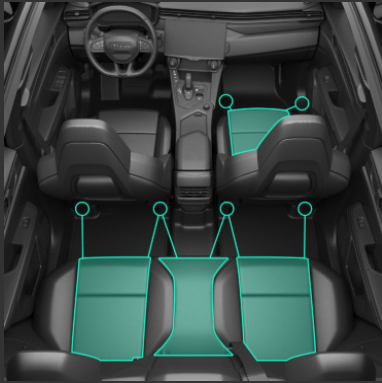

What

Both outer rear seats and the front passenger seat have floor anchors for additional installation of rear-facing child seats using a seat belt.

Where

- **Front passenger seat:** one anchor point on outer seat rail and one on the tunnel console
- **Outer rear seats:** one anchor point on each seat rail of the front seat in front of the outer rear seat
- **Middle rear seat:** one anchor point on the inner seat rails of the front seats

Instructions

- 1 Install the child seat according to the child-seat manufacturer's instructions.
- 2 Attach the strap(s) to the anchor point according to the child-seat manufacturer's instructions.
- 3 Check the child seat and strap(s) are secure.

Forward-facing child seat?

Rear-facing child seats are safer for your child, and the floor anchors are designed to only work with rear-facing child seats. But, the outer rear seats feature top-tether anchors that are suitable for forward-facing seats.

Activate or deactivate front passenger airbag




⚠️ WARNING

Never install a child seat in the front passenger seat when the airbag is activated. If the airbag deploys the child could be killed or seriously injured.

⚠️ WARNING

If the *Warning symbol* in the driver display and *deactivated airbag symbol* in the overhead console are shown at the same time, do not allow anyone to sit in the front passenger seat because they could be seriously injured or killed. Something is wrong with the airbag and you need to [Contact Lynk & Co.](#)

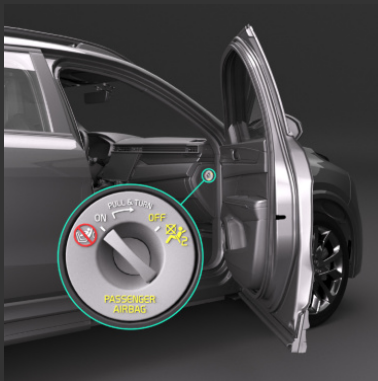

Visual check

The overhead console and the driver display indicate if the front passenger airbag is active or not. If you turn the front passenger airbag on or off, the driver display informs you of the change.



Front passenger airbag **ON**



Front passenger airbag **OFF**

Deactivate

- 1 Pull out the switch.
- 2 Turn to **OFF**.
- 3 Release the switch.

Activate

- 1 Pull out the switch.
- 2 Turn to **ON**.
- 3 Release the switch.

ON or OFF

ON - Anyone over 140 cm in the front seat using the car seat belt

OFF - Any child in the front seat using a rear- or forward-facing child seat

Front passenger airbag warning label



⚠ WARNING

Never use a rearward facing child restraint on a seat protected by an ACTIVE AIRBAG in front of it, DEATH or SERIOUS INJURY to the child can occur.



Where

The warning label is on the sun visor of the front passenger seat.

Why

To remind you to deactivate the front passenger airbag if you are travelling with a child seat on the front seat.

Did you know?

Studies show that it is safer to put your child in the rear seat.

Child safety locks



What

When the child safety lock is active the rear door(s) can't be opened from the inside. You activate/deactivate the child safety lock separately for each rear door.

Note: Activating the child safety locks does not deactivate the rear window controls.

Where

The switch is found on the inside of each rear door.

Activate/deactivate

Use the key blade or a wide, flat object (like a key or flat-headed screwdriver) to turn the switch to the appropriate setting.

What about the windows?

It's all well and good putting the child locks on the doors, but if you want, you can also deactivate the rear window controls.

Child seat compatibility

WARNING

Never install a child seat in the front passenger seat when the airbag is activated. If the airbag deploys the child could be killed or seriously injured.

What

This table shows child seat compatibility with seat belt attachment and/or with ISOFIX/i-Size attachment.

	Front passenger seat (passenger airbag on)	Front passenger seat (passenger airbag off)	Outer rear seats	Center rear seat
Seating position suitable for universal belted all size and mass groups	No	Yes ¹	Yes	Yes ²
i-Size seating position	No	No	Yes	No
Seating position suitable for lateral fixture	n/a	n/a	No	n/a
Largest suitable rearward facing fixture	n/a	n/a	ISO/R3	n/a
Largest suitable forward facing fixture	n/a	n/a	ISO/F3	n/a
Largest suitable booster fixture	n/a	n/a	ISO/B2	n/a

¹ Only when the front passenger seat is adjusted to the highest position.

² A child seat with a support leg may have some interaction with the center console. Check the compatibility of the child seat with the child seat manufacturer.

Follow the rules

Always comply with local laws because they are not the same in all countries.